

AHUJA®

PSX-1200 PA Powered Speaker



- 3 Microphone Inputs
- Inputs for CD & Aux sources
- 1 Keyboard Stereo Input with separate High & Low sensitivities
- Separate Active Bass & Treble Controls, Master Control
- Send/Return for connecting an Effects Processor
- 2-Way Speaker System
12" Full Range Speaker + Piezo Horn




Rear Panel

Multiple Applications


PA Combo... Keyboard Amp... Guitar Amp...

PSX-1200 has a built-in Power Amplifier with multiple inputs for use in a wide variety of PA and Musical Instrument applications. The Direct Coupled Amplifier has extremely low distortion for clean reproduction of Music Programmes. Feature packed PSX-1200 is an ideal equipment for small as well as large gatherings of around 200 people... Music and Vocal Performances, Conferences and Lectures, Presentations, Religious Discourses and Gatherings, Stage Monitors, Touring PA, Mini-Theaters, Pubs and Bars etc.

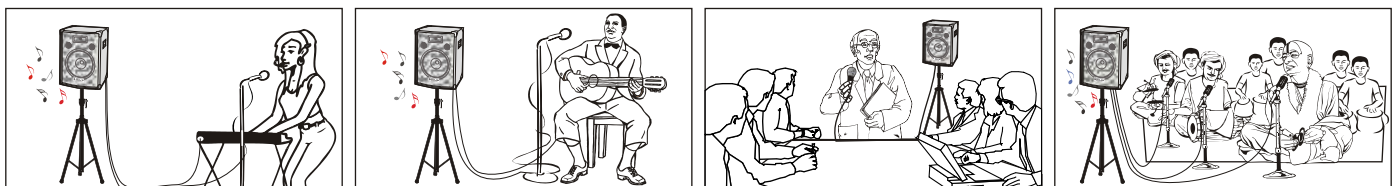

100 WATTS RMS

Interconnections

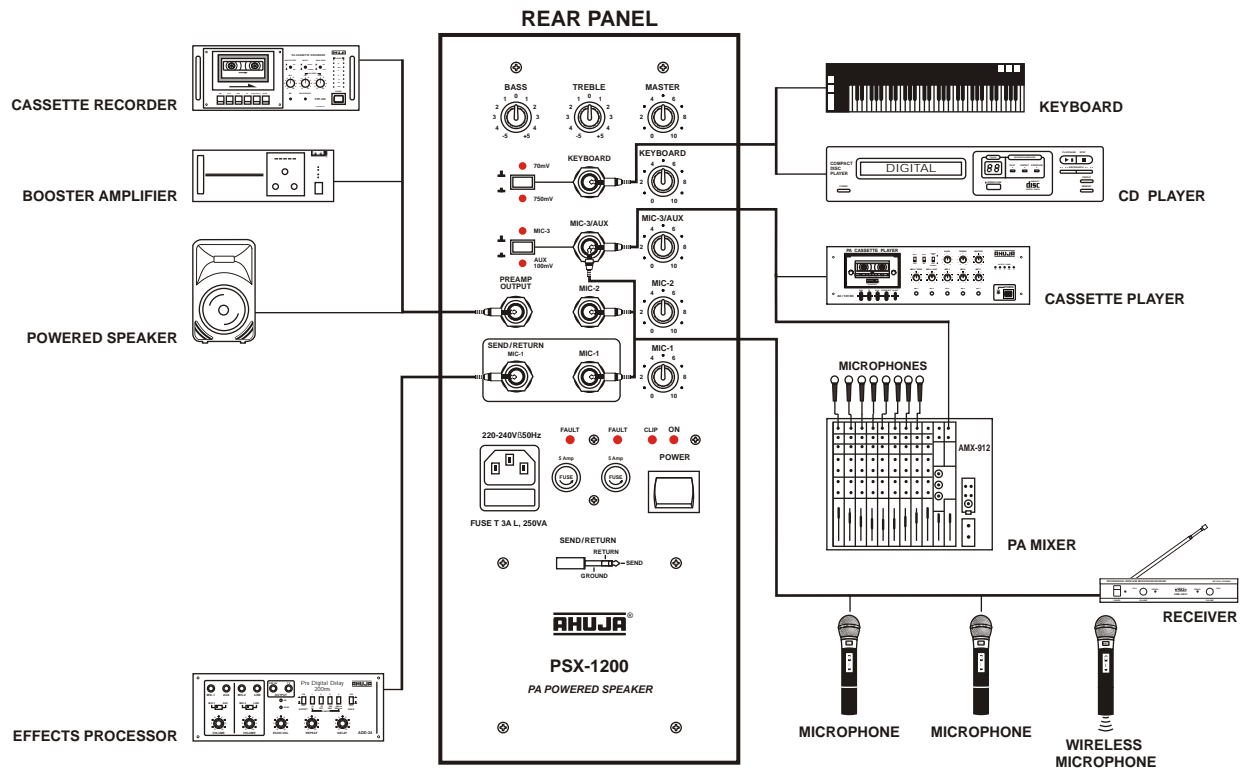

Specifications

| | |
|----------------------|--|
| POWER OUTPUT | : 100W RMS at 1% THD 95W RMS at 0.5% THD |
| OUTPUT REGULATION | : Better than 0.5dB |
| INPUT CHANNELS | : 3 x Mic 0.65mV/4.7kW (Mic source impedance 50W-1kW) 1 x Aux 100 mV/470kW 1 x Keyboard : 70mV/50kW (Stereo Input) : 750mV/50kW (Stereo Input) |
| FREQUENCY RESPONSE | : 40-20,000Hz ±3dB |
| S/N RATIO | : 60dB |
| TONE CONTROLS | : Bass: ±5dB at 100Hz Treble: ±5dB at 10kHz |
| PROTECTION | : AC Fuse 1 x 3A DC 2 x 5A circuit protectors |
| PRE AMP OUTPUT | : 200mV/600W |
| SEND | : 250mV/1kW |
| RETURN | : 250mV/47kW |
| POWER SUPPLY | : AC : 220V-240V 50/60Hz |
| AC POWER CONSUMPTION | : 220VA |
| DIMENSIONS | : W420 x H550 x D420 mm |
| NET WEIGHT | : 24kg |

TRUSOUND PVT. LTD.

C-89, Sector IV, Noida, Gautam Budh Nagar-201 301 (UP)
 Tel.: +91-120-2551452/53 Fax : +91-120-2553677
 Regd. Office : 125E, Okhla Industrial Estate, New Delhi-110 020
 Design and Specifications are subject to change without notice