
## Medium Power PA Amplifier



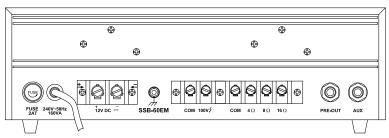

SPECIFICATIONS

## SSB-60EM

60 WATTS ■ AC & 12V DC Operation

- 4 Mic & 1 Aux Inputs.
- Preamplifier Output for connecting to a Booster Amplifier and for recording the programme.
- Instant transfer to DC power (Car Battery) if AC power fails.
- Cut type Bass & Treble Controls.

SPECIFICATIONS	
POWER OUTPUT	90W Max., 65W RMS at 10% THD
	60W RMS at 5% THD, 50W RMS at 2% THD
OUTPUT REGULATION	≤ 2 dB, no load to full load at 1kHz
INPUT CHANNELS	$4 \times$ Mic 0.65mV/4.7kΩ, $1 \times$ Aux 100mV/470 kΩ
FREQUENCY RESPONSE	50-15,000Hz ±3dB
SIGNAL TO NOISE RATIO	60dB
TONE CONTROLS	Bass: -10dB at 100Hz, Treble: -10dB at 10kHz
OUTPUTS	Preamp 200mV/600 $\Omega$
SPEAKER OUTPUTS	$4\Omega$ , $8\Omega$ , $16\Omega$ & $100V$
POWER SUPPLY	AC: 220-240V 50/60Hz DC: 12V (12V Car Battery)
POWER CONSUMPTION	AC: 160VA DC: 3A
DIMENSIONS	W350 × H120 × D265 mm
WEIGHT	7.0kg