

Professional RFID Access Control Terminal

SC502



Features:

Professional access control function:

Embedded relay contacts lock, door sensor, exit button, alarm, 50 time zones, 5 groups, 10 open door combination, support multi-users entry

Universal Interfaced:


Wiegand output model interfaces with all existing Wiegand protocol access control system

Ethernet based:

Standalone or network deployment as you want

Specification:

- Card Holders: 10000 cards
- Transaction Capacity: 30000 records
- CPU: 64bit ZK6001 Microprocessor
- Access Mode: Card Only
- Read Range: 5-10 cm
- Less than 0.2 second Response Speed
- I/O Interface: RS232/485, TCP/IP, USB host
- Built-in relay for connecting lock, door sensor, exit button, alarm
- Wiegand output
- Audiovisual Indicator: Red LED(Access denied)/ Green LED(Access granted) with audible beep
- Power Requirement: 12V DC, 400mA
- Operating Temperature: 0°C-45°C Operating Humidity: 10%-90%
- Other standard function: Short message, Daylight saving
- Optional: Mifare, HID, iClass card, Webserver, Multi-language display

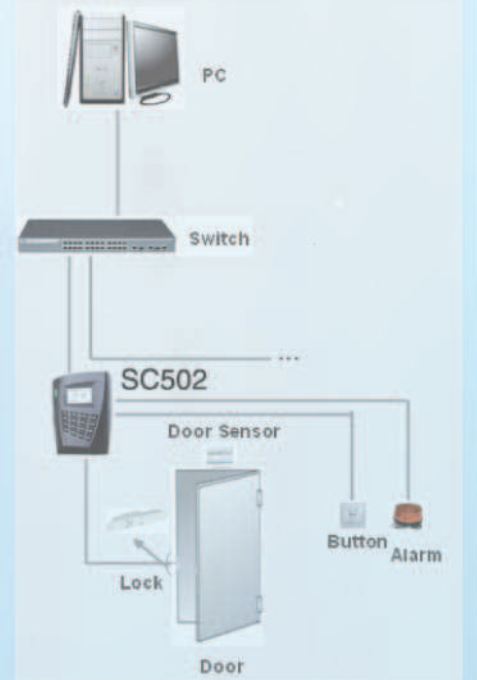



Professional RFID Access Control Terminal

SC503



Features:

Professional access control function:

Embedded relay contacts lock, door sensor, exit button, alarm. 50 time zones, 5 groups, 10 open door combination, support multi-users entry

Universal Interfaced:

Wiegand input&output enables anti-pass back available

Ethernet based:

Standalone or network deployment as you want

Embedded webserver:

Support browser to inquire access data at local or remote

Specification:

- Card Holders: 30000 cards
- Transaction Capacity: 50000 records
- CPU: 64bit ZK6001 Microprocessor
- Access Mode: Card Only
- Read Range: 5-10 cm
- Less than 0.2 second Response Speed
- I/O Interface: RS232/485, TCP/IP, USB host
- Built-in relay for connecting lock, door sensor, exit button, alarm
- Wiegand input&output
- Audiovisual Indicator: Red LED(Access denied)/ Green LED(Access granted) with audible beep
- Power Requirement: 12V DC, 400mA
- Operating Temperature: 0°C-45°C Operating Humidity: 10%-90%
- Other standard function: Webserver, Short message, Daylight saving
- Optional: Mifare, HID, iClass card, Multi-language display

