


# IR Space Dome Camera



## Features

- È Sony Super HAD CCD sensor
- È Built-in 24 pieces IR-LED
- È Effective range up to 20M

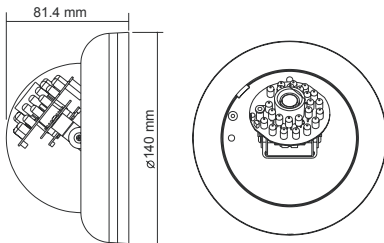

Option :



RYK-8719-3  
L Type Bracket

Model No.	RYK-2G49L	RYK-2G85L	RYK-3G41L	RYK-3G43L
Image Device	1/3" Color Sony Super HAD	1/3" Color Sony Super HAD (Hi-Res.)	1/3" B/W Sony Super HAD	1/3" B/W Sony Super HAD (Hi-Res.)
Picture Elements	NTSC:510x492, PAL:500x582	NTSC:768x494, PAL:752x582	EIA:510x492, CCIR:500x582	EIA:768x494, CCIR:752x582
Resolution	380 TVL	480 TVL	420 TVL	600 TVL
Min. Illumination	0.2 Lux / F2.0 (Day), 0 Lux (IR On)	0.3 Lux / F2.0 (Day), 0 Lux (IR On)	0.1 Lux / F2.0 (Day), 0 Lux (IR On)	0.2 Lux / F2.0 (Day), 0 Lux (IR On)
S/N Ratio	More than 48dB			
Electronic Shutter	NTSC:1/60~1/100,000, PAL:1/50~1/110,000		EIA:1/60~1/100,000, CCIR:1/50~1/110,000	
Gamma	0.45			
Lens Furnished	Board Lens 3.7mm / F2.0 (option:4.3/6/8/12mm)			
White Balance	Auto		-	
Back-Light Comensation	Buit - In			
Day & Night	Auto Selectable			
Gain Control	Auto			
Sync. System	Internal			
Video Output	1 Vp-p / 75 Ohms			
Infrared Luminary	24 pieces IR-LED			
Wavelength	850 nm			
Illuminate Distance	20 M			
Power Supply	DC12V±10%			
Power Consumption	IR On: 400mA max. IR Off: 120mA max.	IR On: 420mA max. IR Off: 200mA max.	IR On: 375mA max. IR Off: 110mA max.	IR On: 375mA max. IR Off: 120mA max.
Operating Temp.	-10°C ~ 50°C			

**Digital Surveillance Solution from Home to Enterprise**

ADON System

E - 185, Sector 63, NOIDA - 201307, INDIA

PHONE: +91 120 425 1364 FAX: + 91 120 4251366

EMAIL: info@adonsystem.com

www.adonsystem.com