



Mini Pan/Tilt Dome Camera

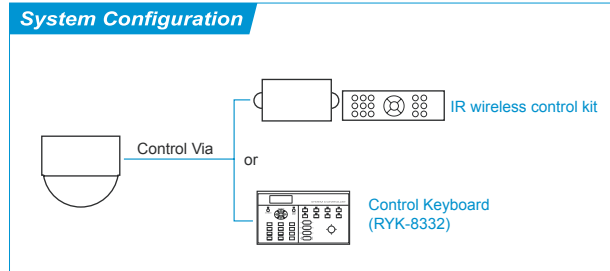

Features

- Auto travel function
- Support 6 preset groups (up to 16 preset points)
- Remote control via RS-485 interface
- Built-in 1 alarm input
- Using IR wireless control kit can control up to 9 devices, Using control keyboard can control up to 15 devices

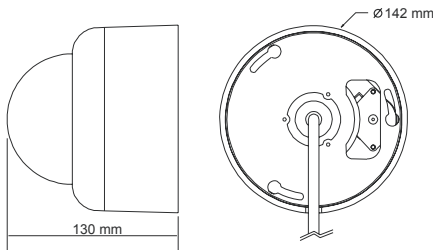

Model No.	RYK-2E49	RYK-2E85
Image Device	1/3" Color Sony Super HAD	1/3" Color Sony Super HAD (HI-Res.)
Picture Elements	NTSC:510x492, PAL:500x582	NTSC:768x494, PAL:752x582
Resolution	380 TVL	470 TVL
Min. Illumination	0.2 Lux / F2.0	0.3 Lux / F2.0
Electronic Shutter	NTSC:1/60~1/100,000, PAL:1/50~1/110,000	
Lens	Board Lens 3.6mm / F2.0 (option:2.5/4.3/6/8/12/16mm)	
White Balance	Auto	
Gain Control	Auto	
Back Light Comp.	Yes	
Pan / Tilt Control	Angle	Pan 0°~340°, Tilt: 0°~80°
	Speed	Manual: Pan 1°~150°/ sec, Tilt: 1°~100°/ sec
	Control	Auto: Pan 1°~300° / sec, Tilt: 1°~200° / sec
Alarm Input	Adjustable N.C. / N.O. property via dip-switch	
Controller Interface	RS-485	
Remote Control	IR wireless control Kit (option: Control Keyboard)	
Preset Point	16 preset points	
Control Command	PELCO D&P protocol	
Sync. System	Internal	
Video Output	1 Vp-p / 75 Ohms	
Power Supply	DC12V ±10%	
Power Consumption	1000mA max.	
Operating Temp.	-10° ~ 40°	

Digital Surveillance Solution from Home to Enterprise